

Gilbarco Electroline Series Pumps and Dispensers

The new generation Electroline lineup gives the best value pump or dispenser in a very compact cabinet to meet the needs of today's 2 grade petrol marketer.

Renowned for Quality and Reliability

1Hose, 2 Hose, 4 Hose

50 lpm, 80 lpm, 130 lpm

Upgradable to change hose mix as needs change



gilbarco electroline

quality, reliability, long life, value

Expanded model range

Pumps and dispensers
1 Hose, 2 Hose, 4 Hose
Standard Flow, Hi-Flow, Ultra Hi-Flow
Combined petrol/diesel, Hi/Lo-Flow

Blackmer pump unit (pump models only)

Intergrated highly efficient air elimination

Proven Gilbarco positive displacement four piston meter

Proven Gilbarco electronics

Highly stable self serve communications
Modular design circuitry and self-diagnostics

Clear, easy-to-read display

Well proven Ferranti-Packard seven segment electro-mechanical display

Cash preset

High Flex Mast

Provides long hose reach and low hose wear

ZVA automatic nozzle

Cabinet, painted and brushed stainless steel

Same size for all models with common base and mounting

Approvals

Fully compliant with NSC, OIML, SAA and Test Safe requirements for Australia and New Zealand

Power requirements

240V +/- 15%, 50Hz, single phase
1 amp – Dispenser models
12 amps – Pump models

Models available

1 Hose Lo-Flo Island	T900A1N
1 Hose Hi-Flo Island	T900A1H
1 Hose UHF Lane	T901A1U
2 Hose Lo-Flo Island	T900A2N
2 Hose Hi-Flo Island	T900A2H
2 Hose Hi/Lo-Flo Island	T900A2M
4 Hose Lane	T902A4N

For pump (suction) add P at end of model number
For dispenser (pressure) add D at end of model number

Flow rates

Standard flow 50 litres/min
Hi-Flow Diesel 80 litres/min
Ultra Hi-Flow Diesel 130 litres/min

Note: Flow rates specified are maximum in ideal conditions.
Flow rates will vary for each individual installation dependent on pipework and suction conditions

Operating temperature and humidity

Temperature -25C to +45C ambient plus sun loading
Humidity 5–95% relative humidity (non-condensing)

Display indicators

Money 5 digit to nearest cent, max 999.99
Volume 5 digit to nearest 1/100, max 999.99
Price per litre 4 digit to nearest 1/10 cent, max 999.9
Preset \$1, \$5, \$20 selections, max \$999.00


Stored totals

Electronic Money – Each hose dollars to 9,999,999.99
Volume – Each hose litres to 9,999,999.99
Mechanical Volume – Each hose litres to 9,999,999.99

Fuel limitations

Maximum Ethanol content 10%
Maximum Methanol content 5%
Maximum MTBE content 15%
Not suitable for Biodiesel

Exceeding fuel limitations, using unsuitable fuels and excessive water in fuels voids the warranty.

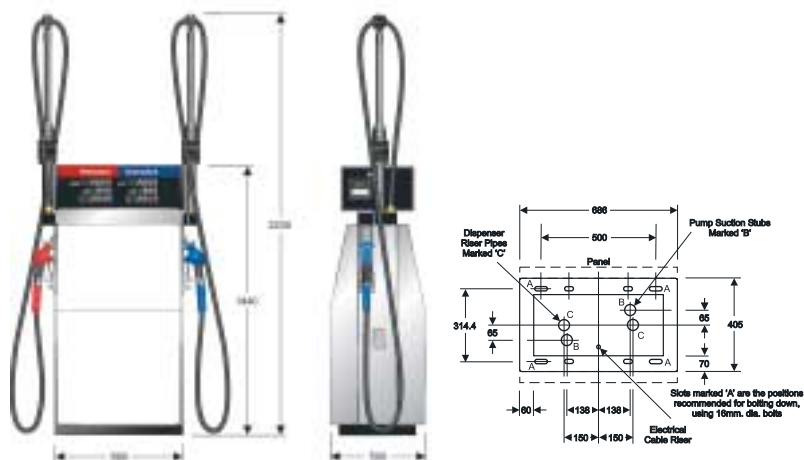

Gilbarco Australia Limited

ACN 000 020 799 ABN 93 000 020 799

Head Office – 20 Highgate Street, Auburn NSW 2144
Sales and Service Centres in All Capital Cities

ALL ENQUIRIES 1300 131 867



GILBARCO
VEEDER-ROOT