
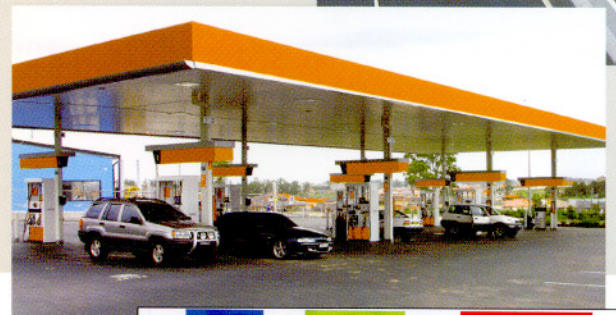


Gilbarco Enterprise Series Dispensers

Modern attractive hi-profile multi product pumps and dispensers ideally suited for starter gate style forecourt designs in a compact footprint for today's multi grade petrol marketer 2 hose, 4 hose, 6 hose and 8 hose.

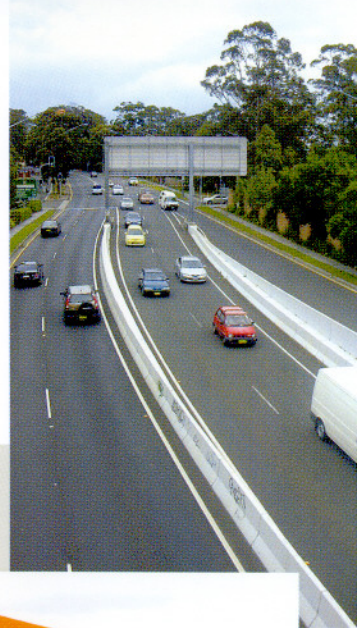

gilbarco enterprise

modern styling, quality, reliability, long life, value

Modern Hi-Profile Style

Gives sleek, clean, uncluttered image
Ideally suited for modern starter gate forecourt designs
See-through gap between the CDM and main body allows for user visibility across the forecourt
Up to 4 grades including diesel

Blackmer pump unit (pump models only)

Integrated highly efficient air separation

Proven Gilbarco four piston meter

Positive displacement type

Proven Gilbarco electronics

Highly stable self serve communications
Modular design circuitry and self-diagnostics

High visibility LCD display

Proven backlit LCD highly visible in bright daylight

Cash preset

Hose Reach 2.9m standard

Optional extended hose reach and retraction

ZVA Slimline automatic nozzle

With ES-Break coupling and two way swivel on std-flo

Cabinet – polyester powder coated steel

Same size for all models with common base
Stainless steel lower and put-down panels optional

Approvals

Fully compliant with NMI, OIML, SAA and Test
Safe requirements for Australia and New Zealand

Models available

Pumps (suction)	
8 Hose Petrol/Diesel	T185P8
6 Hose Petrol/Diesel	T185P6
4 Hose Petrol/Diesel	T185P4
2 Hose Diesel HiFlo	T185P2H
Dispensers (pressure)	
8 Hose Petrol/Diesel	T185D8
6 Hose Petrol/Diesel	T185D6
4 Hose Petrol/Diesel	T185D4
2 Hose Diesel HiFlo	T185D2H
2 Hose Diesel Ultra HiFlo	T185D2U

Power requirements

240V +/- 15%, 50Hz, single phase
15 amp maximum

Flow rates

Standard flow 50 litres/min
Hi-Flow Diesel 80 litres/min
Ultra Hi-Flow Diesel 130 litres/min (dispenser)

Note: Flow rates specified are maximum in ideal conditions
Flow rates will vary for each individual installation
dependent on pipework and suction conditions

Operating temperature and humidity

Temperature -10C to +45C ambient plus sun loading
Humidity 0–90% relative humidity (non-condensing)

Display indicators

Money 5 digit to nearest cent, max 920.00
Volume 5 digit to nearest 1/100, max 950.00
Price per litre 4 digit to nearest 1/10 cent, max 999.9
Preset \$1, \$10 selections, max \$999.00


Stored totals

Electronic Money – Each hose dollars to 99,999,999
Volume – Each hose litres to 99,999,999
Mechanical Volume – Each hose litres to 9,999,999

Fuel limitations

Maximum Ethanol content 10%
Maximum Methanol content 5%
Maximum MTBE content 15%
Suitable for Biodiesel when special compatible hoses fitted

Exceeding fuel limitations, using unsuitable fuels and excessive water in fuels voids the warranty.

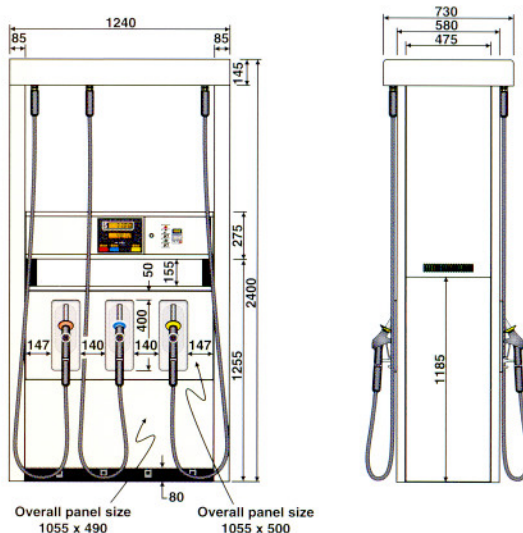

Gilbarco Australia Limited

ACN 000 020 799 ABN 93 000 020 799

Head Office – 20 Highgate Street, Auburn NSW 2144
Sales and Service Centres in All Capital Cities

ALL ENQUIRIES 1300 131 867



GILBARCO
VEEDER-ROOT