

# Gilbarco LowLine Series Pumps and Dispensers

Modern attractive low-line multi product pumps and dispensers provide an open style image for all forecourt designs in a stylish and compact cabinet that meets the needs of today's multi grade petrol marketer.

Renowned for Quality and Reliability  
Backed by Gilbarco's own national service network

2 Hose, 4 Hose, 6 Hose

Improved hose reach

Upgradable to change hose mix as needs change



# gilbarco lowline

modern styling, quality, reliability, long life, value

## Modern Low-Line Styling

Gives sleek, clean, uncluttered image  
Greater visibility over the forecourt  
Developed in Australia to meet the latest design criteria for dispenser construction specified in AS/NZS2229 released mid 2004

## New Corporate pump unit (pump models only)

With improved design air separation system

## Proven Gilbarco four piston meter

Positive displacement type

## Proven Gilbarco electronics

Highly stable self serve communications  
Modular design circuitry and self-diagnostics

## Clear, easy-to-read display

Well proven Ferranti-Packard seven segment electro-mechanical display

## Cash preset

## Improved hose reach

For fuelling on far side of vehicle

## ZVA Slimline automatic nozzle

## Cabinet – polyester powder coated steel

Same size for all models with common base  
Fit to early model Gilbarco low profile bases  
Easily adaptable to other popular model bases

## Approvals

Fully compliant with NMI, OIML, SAA and EMC requirements for Australia and New Zealand

## Models available

Pumps (suction)	
6 Hose Petrol/Diesel	T910A6NP
4 Hose Petrol/Diesel	T910A4NP
2 Hose Diesel HiFlo	T910A2HP
Dispensers (pressure)	
6 Hose Petrol/Diesel	T910A6ND
4 Hose Petrol/Diesel	T910A4ND
2 Hose Diesel HiFlo	T910A2HD

Mixed StdFlo/HiFlo models available.

## Power requirements

240V +/- 15%, 50Hz, single phase  
15 amp maximum

## Flow rates

Standard flow 50 litres/min  
Hi-Flow Diesel 80 litres/min

Note: Flow rates specified are maximum in ideal conditions  
Flow rates will vary for each individual installation dependent on pipework and suction conditions

## Operating temperature and humidity

Temperature -25C to +55C ambient plus sun loading  
Humidity 5–95% relative humidity (non-condensing)

## Display indicators

Money 6 digit to nearest cent, max 9999.99  
Volume 6 digit to nearest 1/100, max 9999.99  
Price per litre 4 digit to nearest 1/10 cent, max 999.9  
Preset \$1, \$5, \$20 selections, max 9960.00


## Stored totals

Electronic Money – Each hose dollars to 9,999,999.99  
Volume – Each hose litres to 9,999,999.99  
Mechanical Volume – Each hose litres to 9,999,999.99

## Fuel limitations

Maximum Ethanol content 10%  
Maximum Methanol content 5%  
Maximum MTBE content 15%  
Suitable for Biodiesel when special compatible hoses fitted

Exceeding fuel limitations, using unsuitable fuels and excessive water in fuels voids the warranty.

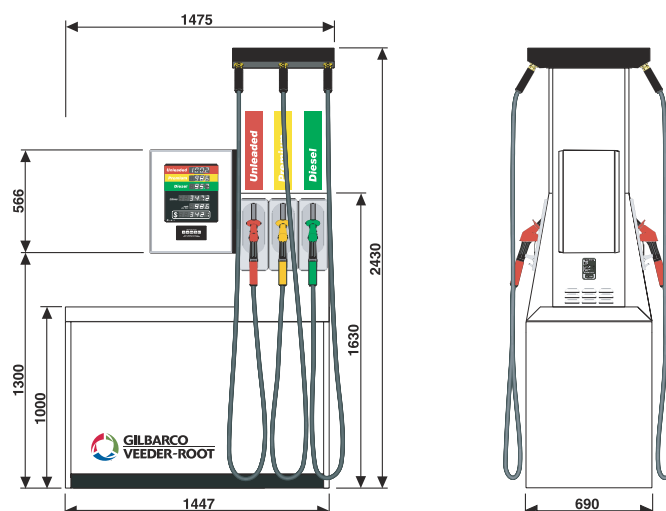

## Gilbarco Australia Limited

ACN 000 020 799 ABN 93 000 020 799

Head Office – 20 Highgate Street, Auburn NSW 2144  
Sales and Service Centres in All Capital Cities

**ALL ENQUIRIES 1300 131 867**



**GILBARCO  
VEEDER-ROOT**